

# PACS Construction Laboratories and Testing Services

4560 West 34<sup>th</sup> Street, Suite J, Houston Texas 77092 Telephone: (713) 681-6606, Facsimile: (713) 681-6608

## REPORT OF LABORATORY TESTING SERVICES

PROJECT: Southern Crushed Concrete – Various Testing	Date: 04/08/2015
CLIENT: Southern Crushed Concrete	PACS PROJECT NO.: SCC2007 PACS REPORT NO.: SCC1043

The material was sampled by:

TECHNICIAN: Frank Buskirk TIME –REGULAR HOURS: 4.0 Hrs. OVERTIME HOURS: 0.0 Hrs.

REMARKS: On April 02, 2015, a representative for PACS Construction Laboratories and Testing Services (PACS) reported to the Southern Crushed Concrete Plant Facility #06 (Tanner Yard) located on 10360 Tanner Road in Houston, Texas to sample, inspect, and test 3 inch by 5 inch Bull Rock (also known as Granular Fill) material stockpiled at the aforementioned location.

A representative sample of the stockpile material was obtained by use of a frontend loader. A sample was extracted from the stockpile, placed adjacent to the stockpile and all individual pieces of the sample were measured. A total of 191 pounds of material was measured and tested. These results are presented as follows:

<u>Sieve Size</u>	<u>Sample Results, % Passing</u>	Project Specification, HCFCD Section 02378 (2.2B1) <u>% Passing</u>
5"	100	100 Minimum
3"	0	0 Maximum


The Sieve Size test results satisfy HCFCD Section 02378 requirements.

If there are any questions regarding this report or if we can provide any additional information, please contact us at your convenience.


### COMMENTS:

Distribution:

- (1) Lupe Suarez, Southern Crushed Concrete
- (1) Jim Miller, Southern Crushed Concrete
- (1) Chris Cosey, Southern Crushed Concrete

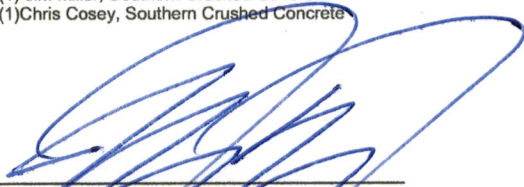  
John Ynigues, Project Manager  
PACS Construction Laboratories, Inc.

  
Frank E. Herbert, PE  
Herbert & Associates, Registration No. F-9496

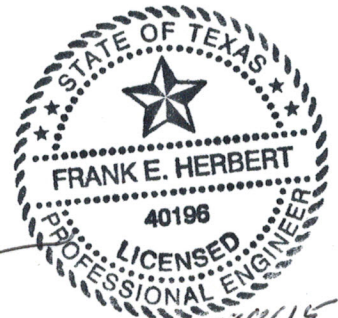

Test results apply to the sample or samples tested which may or may not be indicative of the completed product. Letters and Reports are for the exclusive use of the client who has permission from PACS Construction Laboratories to distribute as necessary. Samples tested will be retained by the testing laboratory for 30 Days unless otherwise notified by the client. Report SCC1043